

$nm^2 \in \mathbb{P} \mathbb{D}$
 c'

nc
 p
 $c \in \mathbb{P} \mathbb{D}$

$v \in \mathbb{P} \mathbb{D}$


$l \in \mathbb{P} \mathbb{D}$
 $c \in \mathbb{P} \mathbb{D}$
 $nc \in \mathbb{P} \mathbb{D}$
 $v \in \mathbb{P} \mathbb{D}$
 $ij \in \mathbb{P} \mathbb{D}$
 $ij \in \mathbb{P} \mathbb{D}$

$ij \in \mathbb{P} \mathbb{D} \# AIY \quad di4 ' \mathbb{D} k \hat{O} 4 ' \mathbb{D} p$

reliable clamping

for PET preform
ensure the fast
+ and
the mold.

© 2014 Y&D

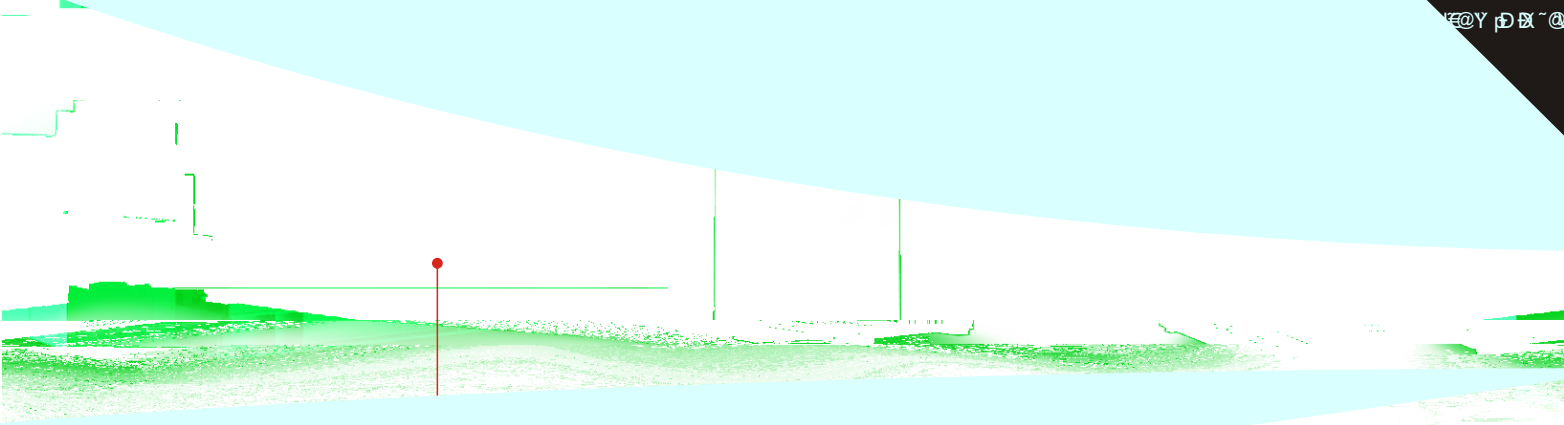

Servo motor drive hydraulic system

The hydraulic system was driven by a servo motor which ensure the lower energy consumption and sufficient hydraulic power supply.○

制系统 SIEMENS cont



Capacity Of Non-cutting PET Preform Mold

Water	L/min	100	100	120	125
Compressed Air	Mpa	0.7-0.9	0.7-0.9	0.7-0.9	0.7-0.9
	L/min	400	400	800	800
Machine Size(LxWxH)	cm	840x160x240	860x160x240	880x170x250	1020x210x250
		14	14	17	18

